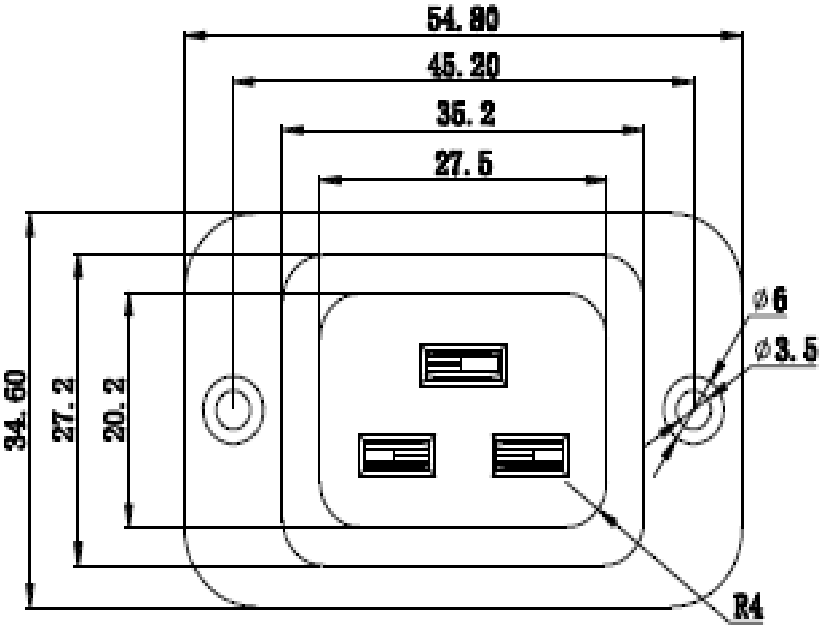


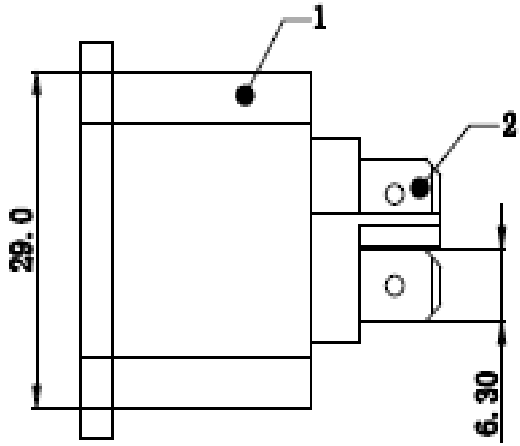


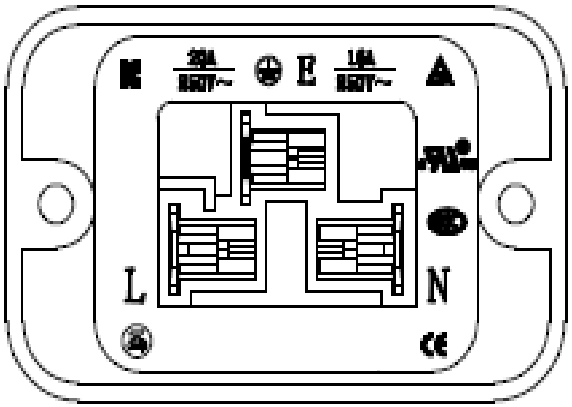


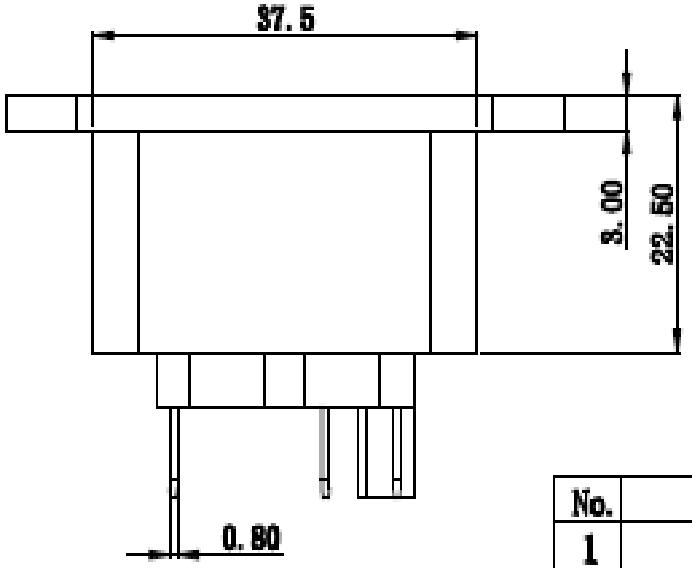


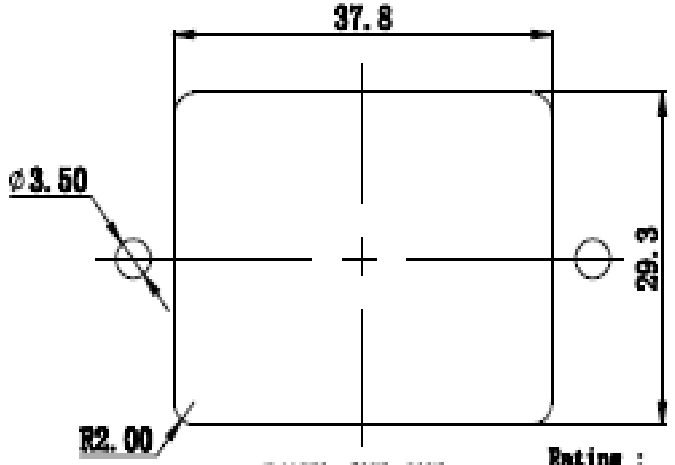


PANEL CUT-OUT

| No. | Name | Material | Quantity |
|---|---|---|---|
| 1 | Base | PA66 | 1 |
| 2 | Shrapnel terminal | Brass t0.8 | 3 |

Rating :
16A 250V AC KC CE SC TUV
20A 250V AC UL cUL

Insert And Extract Force: 1.36kgf-6.8kgf

Terminal Strength: ≥80N

Operating Life: ≥5000 cycles

Withstand Voltage: Between all terminals:2500VAC (50-60Hz)1min
terminals to Base:3750V AC (50-60Hz)1min
Leakage Current : 1mA

Insulation Resistance: ≥100MΩ 500V DC